



V 40TSLD

	Kw	motore	l/min mc/h	25	120	193	256	313	355	500	667	750
V 40TSLD	5,5	DIESEL	H(m)	1,5	7,2	11,6	15,4	18,8	21,3	30	40	45
V 50TSLD	7,5			25	20	15	10	5	1			
V 1XRD	5,5				37	35	33	21	29,5	23	10	
V 2XRD	7,5				40	39,5	38,9	37,2	36,5	32	25	20
V 25XRD	7,5							56	55	53	45	

	Kw	motore	l/min mc/h	225	233	267	300	333	367	400	433	467	500	533	567	600	633	667	700
VTA 501	9	DIESEL	H(m)	13,5	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42
VTA 502	15				36	30	24,5	20	15	10	5	2							
VTA 601	9			79	75	64	50	40	30	20	13	7							
VTA 602	18								75	70	66	61	55,3	50	43	36	30	25	15

CARATTERISTICHE

- **Corpo pompa:** bronzo
- **Girante:** bronzo
- **Albero:** acciaio inox AISI 316

- **Tenuta:** meccanica
- **Motore:** diesel, benzina
- **Avviamento elettrico:** a richiesta

APPLICAZIONI

- in agricoltura, per irrigazione a pioggia o scorrimento

- nella protezione civile, per svuotamenti d'emergenza

Sito Web






Catalogo Generale



Feit Pompe S.r.l.
Via Venezia, 34/g - 10088 - Volpiano (TO) - ITALIA
Tel: +39 (0)11 9884327 - info@feit.srl - feit.srl

FEIT
1946
Evolving with you...

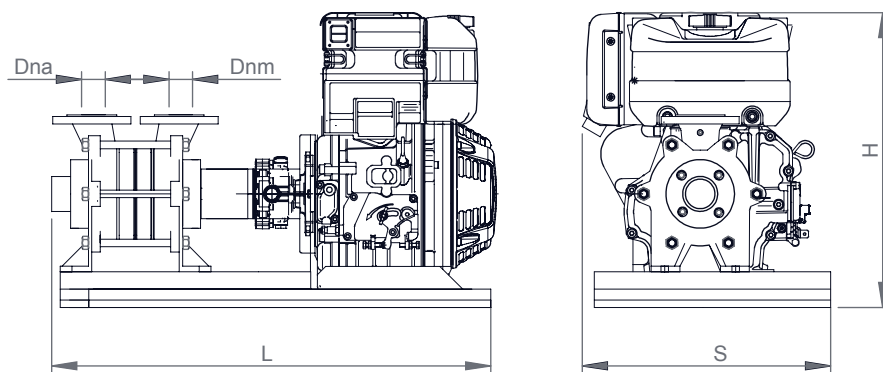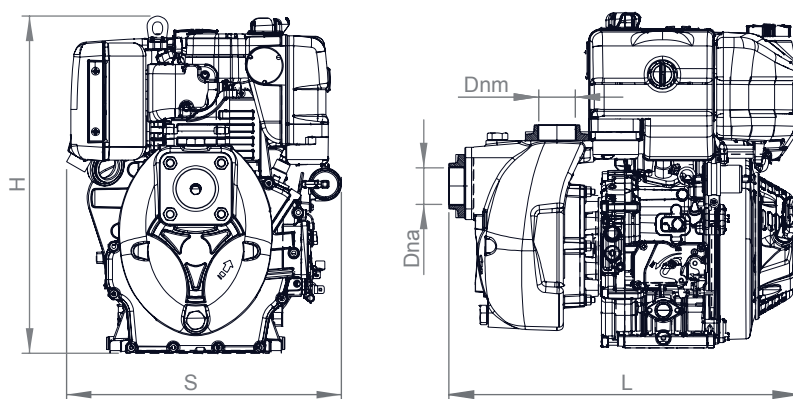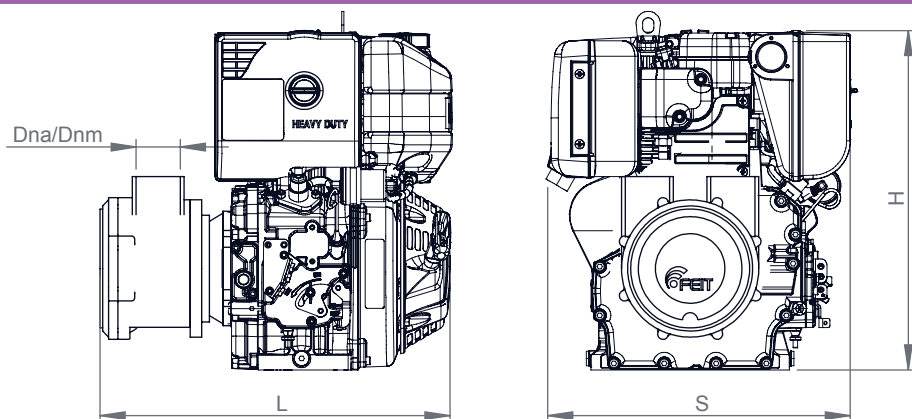

	Dna	Dnm	L	S	H	Kg
V 40TSLD	1/2" g	1/2" g	420	410	450	48
V 50TSLD	2" g	2" g	450	420	510	52
V 1XRD	2" g	1 1/2" g	470	410	450	56
V 2XRD	2 1/2"	2" g	541	420	510	70
V 25XRD	2 1/2"	2" g	541	420	510	75
VTA 501	50	50	1150	520	700	210
VTA 502	50	50	1250	610	800	260
VTA 601	65	65	1200	630	700	280
VTA 602	65	65	1300	640	800	310

Sito Web



Catalogo Generale



Feit Pompe S.r.l.

Via Venezia, 34/g - 10088 - Volpiano (TO) - ITALIA

Tel: +39 (0)11 9884327 - info@feit.srl - feit.srl

FEIT
1946
Evolving with you...