ELECTRIC-SELF PRIMING DIAPHRAGM PUMPS

Series
JDREX

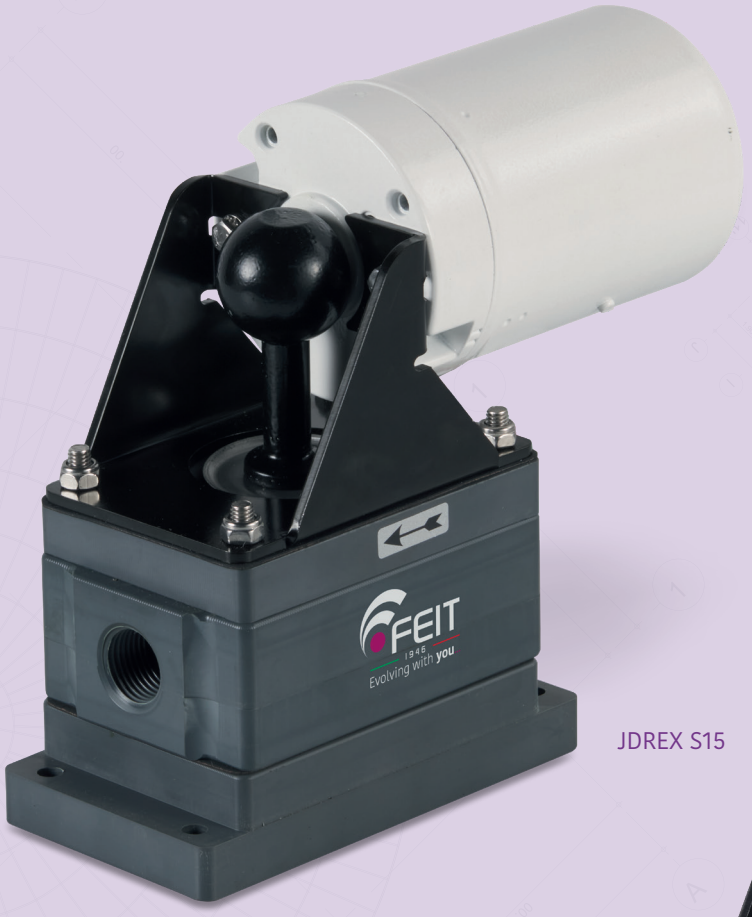

JDREX S15

JDREX S40

Sito Web

Catalogo Generale

Feit Pompe S.r.l.
Via Venezia, 34/g - 10088 - Volpiano (TO) - ITALIA
Tel: +39 (0)11 9884327 - info@feit.srl - feit.srl

FEIT 1946 Evolving with **you...**

ELECTRIC-SELF PRIMING DIAPHRAGM PUMPS

Series
JDREX

	Kw	Volt	Amp. Max	Caratteristiche //performance
				lt.=litri/min m=metri
					Raccordi
					Ports

JDREX S15	0,12	12 24	7 4	m. 0 - 2 - 4 - 6 - 8 - 10 lt. 18 - 16 - 15 - 14 - 13 - 12	1/2" gas f 20 mm
JDREX S40	0,20	12 24	12 6	m. 0 - 2 - 4 - 6 - 8 - 10 lt. 37 - 34 - 31 - 28 - 27 - 27	3/4" gas f 25 mm
JDREX S40	0,09	230 230/400T	0,73 0,59/0,34	m. 0 - 2 - 4 - 6 - 8 - 10 lt. 37 - 34 - 31 - 28 - 27 - 27	3/4" gas f 25 mm

CHARACTERISTICS

- Immediate self priming without pre filling the body of the pump
- Maximum reliability of operation, even after being inactive for long periods
- No foot valves, no filter
- No maintenance required
- Quick installation
- All components of the pump are resistant to sea water corrosion
- Can run dry without any damage because they have no impeller seals or other delicate or fragile parts

APPLICATIONS

- extracting sea water, bilge
- transferring diesel
- water supply for trailers, boats, camper
- transferring soft water and sea water
- Ecologic sampling

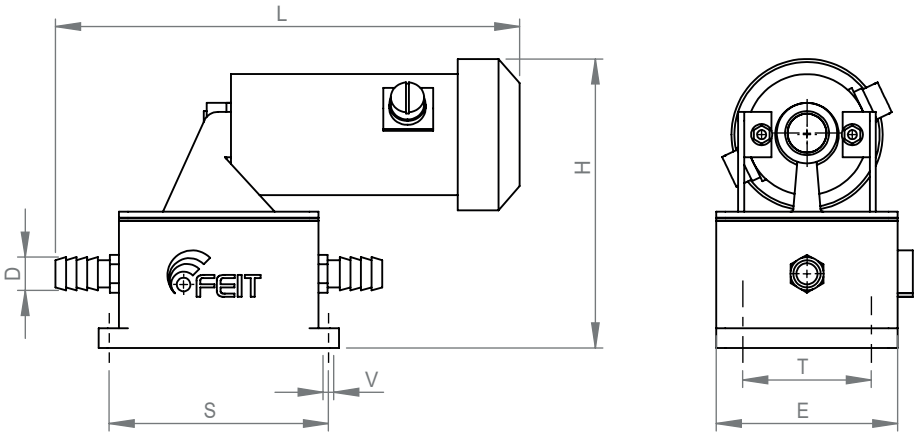

	L	H	E	S	T	V	D	Kg
JDREX S15	232	163	75	120	52	7	1/2"gas 20 mm	2,8
JDREX S40	290	201	116	144	85	7	3/4" gas 25 mm	4,2
JDREX S40	290	240	116	144	85	7	3/4" gas 25 mm	4

MATTEOFARNÉ.it

Feit Pompe S.r.l.
Via Venezia, 34/g - 10088 - Volpiano (TO) - ITALIA
Tel: +39 (0)11 9884327 - info@feit.srl - feit.srl

FEIT 1946 Evolving with **you**...